

Technical Data Extension Module DFM300

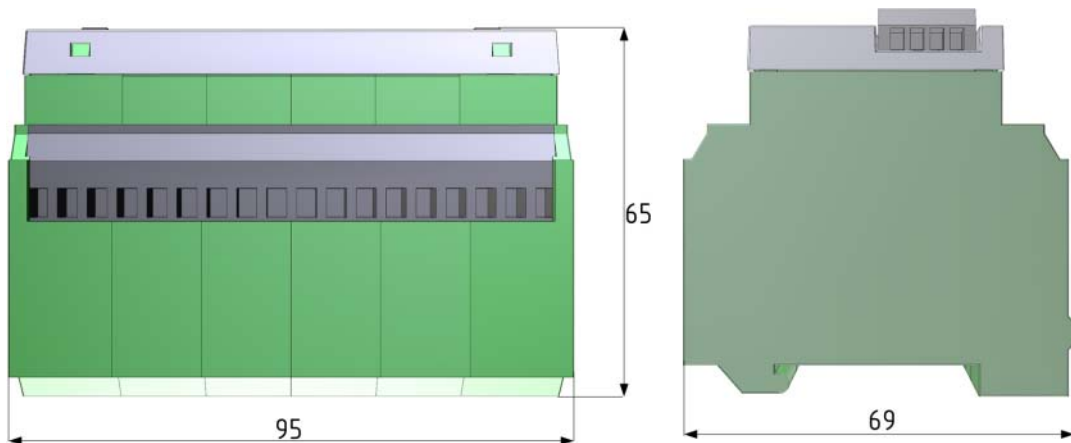


Fig. 1-1 Dimensions DFM300

General data	
Power supply	24 VDC
Power supply for 230/115 V in/outputs	230 V +10/-15 V, 47 ... 63 Hz 120 V +10/-15 V, 47 ... 63 Hz
Current consumption	140 mA
Housing	PVC or Polyamide 6.6 (panel: polycarbonate)
Dimensions (HxWxD)	max. 65x70x95 mm (2.56"x2.76"x3.74" in)
Weight	79 g (0.17 lb)
Flammability	UL-94 V0 (panel: UL-94 V2)
Mounting position	as desired
Installation	TS35 mounting rail as per EN 50022 or TS32 as per EN 50035
Connection cross section	2.5 mm ² (13 AWG)

Environmental Conditions

Operation	Climatic conditions	Class 3K5 according to DIN EN 60721-3
	Mechanic conditions	Class 3M5 according to DIN EN 60721-3
	Temperature range	-20 ... +60 °C (-4 ... +140 °F) (condensation is prohibited)
Transport	Climatic conditions	Class 2K3 according to DIN EN 60721-3
	Mechanic conditions	Class 2M2 according to DIN EN 60721-3
	Temperature range	-20 ... +70 °C (-4 ... +158 °F) (condensation is prohibited)
Storage	Climatic conditions	Class 1K3 according to DIN EN 60721-3
	Mechanic conditions	Class 1M2 according to DIN EN 60721-3
	Temperature range	-20 ... +70 °C (-4 ... +158 °F) (condensation is prohibited)
Electronic safety	Degree of protection (DIN EN 60529)	IP40 housing IP20 terminals

NOTICE

The limits of the technical data must be strictly adhered to.

Technical Data Extension Module DFM300

Order Information

Description / Type	Order no.
DFM300 - Dual fuel extension module for BT340 230 VAC	667R0600-1
DFM300 - Dual fuel extension module for BT340 120 VAC	667R0600-2



only for 120 VAC



The information in this publication is subject to technical changes.

**LAMTEC Meß- und Regeltechnik
für Feuerungen GmbH & Co. KG**

Wiesenstraße 6
D-69190 Walldorf
Telefon: +49 (0) 6227 6052-0
Telefax: +49 (0) 6227 6052-57

info@lamtec.de
www.lamtec.de

