

Technical Data PSU2415



Fig. 1 Power supply PSU2415

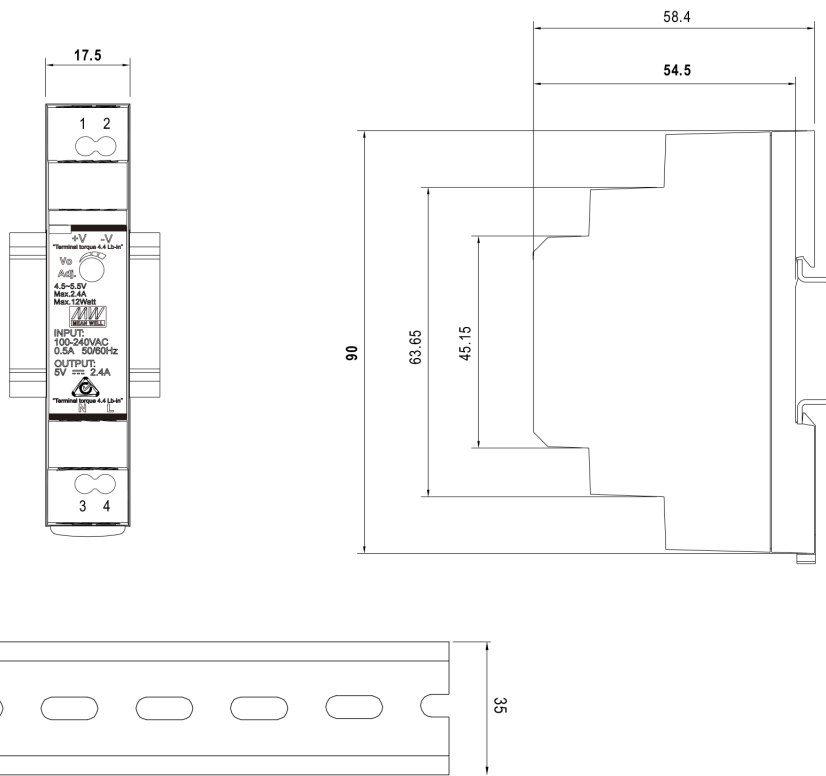


Fig. 2 Dimension power supply PSU2415

Technical Data PSU2415

Technical Data PSU2415			
Dimension (h x w x d)	90 x 17.5 x 58.4 mm 3.54 x 0.69 x 2.30" in		
Weight	78 g 0.17 lb		
Material	plastic		
Housing colour	grey		
Display	LED (power ON)		
Connection			
Outputs	24 V		
	nominal current	0.63 A	
	power rate	15.2 W	
Inputs	power supply	85 ...264 VAC	
	mains frequency	47 ... 63 Hz	
		115 VAC	230 VAC
	current consumption	0.5 A	0.25 A
	inrush current (type)	25 A	45 A
Conditions of Use			
Mounting	on DIN mounting rail TS35/7.5 or TS35/15		
Environmental Conditions			
Operation	permissible temperature range	-30 ... +70 °C -22 ... +158 °F (non-condensing)	
	permissible humidity	20 ... 90 % relative humidity	
Transport/Storage	permissible temperature range	-40 ... +85 °C -40 ... +185 °F (non-condensing)	
	permissible humidity	10 ... 95 % relative humidity	
Protection class	DIN EN 61140	II	
Degree of protection	DIN EN 60529	IP20	

NOTICE

The limits of the technical data must be strictly adhered to.

Technical Data PSU2415

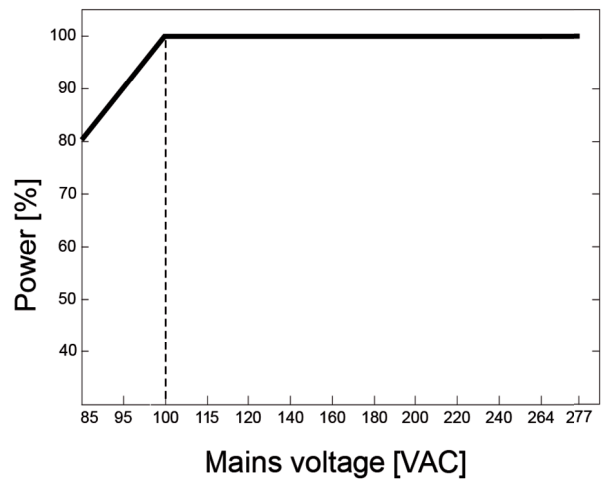
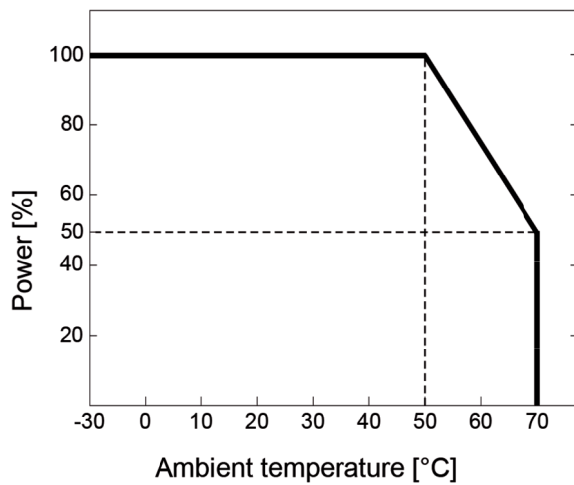


Fig. 3 Power reduction depending on the ambient temperature Fig. 4 Power reduction depending on the power supply

Order Information

Power Supply Units PSU2415

Description/Type	Order no.
PSU2415 power supply unit 100 ... 240 VAC/24 VDC, 15 W	668R0015

Approvals



The information in this publication is subject to technical changes.



**LAMTEC Meß- und Regeltechnik
für Feuerungen GmbH & Co. KG**

Josef-Reiert-Straße 26

D-69190 Walldorf

Telefon: +49 (0) 6227 6052-0

Telefax: +49 (0) 6227 6052-57

info@lamtec.de

www.lamtec.de

