



System Overview

Lambda Transmitter LT3
Lambda Probe LS2
Combination Probe KS1D



Sensors and systems for combustion engineering

www.lamtec.de

LAMTEC Measuring System LT3 with LS2 or KS1D.

The cost-effective package for simultaneous $\text{CO}_e/\text{H}_2/\text{O}_2$ measurement or pure O_2 measurement.

With the LT3 Lambda Transmitter, LAMTEC provides customers with a simple, cost-effective device for the simultaneous measurement of oxygen (O_2) and oxidising gas components (CO_e), or for simple oxygen (O_2) measurement.

When used with LAMTEC's KS1D combination probe, the LAMTEC LT3 is a universal measuring device based on microprocessor technology. The transmitter has been specifically developed for the simultaneous measurement and detection of O_2 concentration and oxidising components CO_e (CO/H_2) in flue gas emissions from combustion systems in the super-stoichiometric range ($\lambda > 1$). The measurement value CO_e (e = equivalent) is the sum signal of all oxidisable emission components such as CO and H_2 . Alternatively, the LAMTEC Probe LS2 can be used to only measure oxygen (O_2). In its basic configuration LT3 is certified against Safety Integrity Level SIL1.

The LT3 evaluates the voltage values of two measurement electrodes U_{O_2} (oxygen characteristic) and the mixed potential ($U_{\text{O}_2} + U_{\text{CO}/\text{H}_2}$). The KS1D's outputs for O_2 and CO_e measurement are dynamic with fast responses.

This makes simultaneous measurement and detection of CO_e (CO/H_2) and O_2 using the LAMTEC Transmitter LT3 is therefore superior against O_2 measurement alone

Advantages:

- In-situ measurement of oxygen (O_2) and detection of oxidising exhaust gas components CO_e (CO/H_2) in the flue gas up to a temperature of 1,400 °C
- Pure O_2 measurement range: 0 to 21 vol. %
- CO_e measurement range: 0 to 10,000 ppm
- Not affected by ingress/tramp air (CO_e)
- No sample gas conditioning required, measurement directly in the moist flue gas
- Response time to 60 % (T_{60})
 $\text{O}_2 < 3$ seconds (unfiltered)
 $\text{CO}_e < 3$ seconds (unfiltered)
- Low heating power depending on the exhaust gas temperature
- Certified flame arrester
- Simple to use – probe connection using plug-in socket
- Low-maintenance
- Approved according to DIN EN 16340
- Basic configuration certified against SIL1



in insensitivity and reaction time and provides first-class basic for control of fuel and air afterwards.

Measurement Principle

The LAMTEC KS1D Combination Probe is based on a heated electrochemical measuring cell made from zirconium dioxide ceramic (ZrO_2).


It has 3 electrodes:

- O_2 electrode (platinum)
- CO_e electrode (platinum/noble metal)
- Reference electrode (platinum)

The Lambda Sonde LS2 is missing the CO_e -Elektrode. The one designed as a tube closed on one side Zirconium dioxide ceramic protrudes into the exhaust duct of the firing system and separates the reference gas space (surroundings) gas-tight from the measuring gas space (exhaust gas duct).

System overview.

Various probe designs.

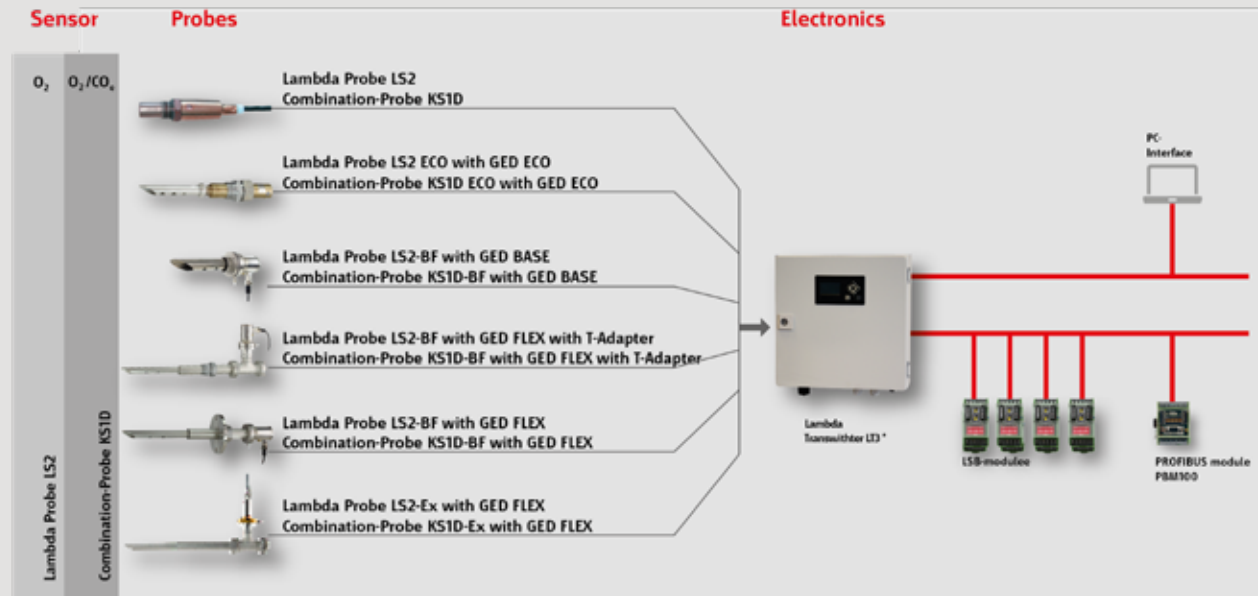

* Only one probe possible for each LT3.
Functions of the LT3 with LS2 | KS1D.

Basic System.



LT3 with user interface.



LT3 connections on the bottom side.

Lambda Transmitter LT3

The LAMTEC Lambda Transmitter LT3 comes with a user interface (UI). The user interface is attached to the front door and is equipped with the following functions:

- Readings for O_2 and CO_e measuring values
- Information on the probe, fuel, warnings, faults, software version, CRC and serial number
- Calibration of measurements
- Settings for maintenance, filter time, analogue output, replacing of probes, display, and more functions and parameter settings.

The following connections are located on the underside of the device:

- Power supply
- Probe connector (probe signal/probe heater)
- External LSB connector for the computers (use of LAMTEC remote software)
- Cable bushing for connection to LAMTEC SYSTEM BUS
- Cable bushing for connection to LSB modules

Lambda Transmitter LT3 in stainless steel housing



The Stainless Steel Housing

The Lambda Transmitter LT3 and the LT3-F are optionally available in stainless steel housing which prevents corrosion when in contact with water or salt. Moreover, the steel housing makes both suitable for use in areas with high hygienical requirements such as the food industry.

Lambda Transmitter LT3-F



The Lambda Transmitter LT3-F is, in contrast to the standard LT3, equipped with a monitoring processor. In combination with the LAMTEC burner control units such as ETAMATIC, BurnerTronic or CMS, the SIL2 specific CO/H₂ control is made possible.

Lambda Transmitter LT3-Ex



LT3-Ex

The LT3-Ex Lambda Transmitter is used in combination with an Ex probe, a measuring system for the continuous measurement of the concentration of O₂ and oxidizing components (CO/H₂). The LT3-Ex is used in potentially explosive areas.
IECEX/ATEX: IIG Ex db eb IIC T6 Gb

Probes.

The LAMTEC probes support both O₂ measurement (LS2 Lambda Probe) and simultaneous measurement (KS1D Combination Probe) of O₂ concentration and combustible oxidising gas components (CO/H₂), displayed as CO_e (CO equivalent).

Lambda Probe LS2 / Combination Probe KS1D



LS2 / KS1D

Features:

- Ideal flue gas speed: 1-4 m/sec
- Flue gas temperature: ≤ 450 °C
- Permissible exhaust gas temperature at the probe head 300 °C for device variants with SIL certificate
- Protection class: IP42, if installed outdoors the probe has to be protected against water

Areas of application:

- Natural gas, EL heating oil.

Lambda Probe LS2 / Combination Probe KS1D in standard housing with GED ECO



LS2 GED ECO / KS1D GED ECO

Features:

- Ideal flue gas velocity:
At gas temperatures < 100 °C: 1 < x < 6 m/s
At gas temperatures > 100 °C: 1 < x < 12 m/s
- Flue gas temperature: ≤ 300 °C
- Dust concentration: ≤ 100 mg/m³
- Permissible exhaust gas temperature at the probe head 300 °C for device variants with SIL certificate
- Protection class : IP42, if installed outdoors the probe has to be protected against water, snow etc.

Areas of application:

- Natural gas, EL heating oil

Lambda Probe LS2-BF / Combination Probe KS1D-BF with GED BASE



LS2-BF GED BASE / KS1D-BF GED BASE


Features:

- Tested filter concept against flashbacks in H₂-applications
- Ideal flue gas velocity:
 - at gas temperatures < 100 °C: $1 < x < 10$ m/s
 - at gas temperatures > 100 °C: $1 < x < 20$ m/s
- Flue gas temperature: ≤ 550 °C
- Dust concentration: ≤ 200 mg /m³
- Calibration during operation using test gas is possible.
- Permissible exhaust gas temperature at the probe head 300 °C for device variants with SIL certificate
- Protection class is IP65.

Areas of application:

- Natural gas, EL heating oil

Lambda Probe LS2-BF / Combination Probe KS1D-BF with GED FLEX

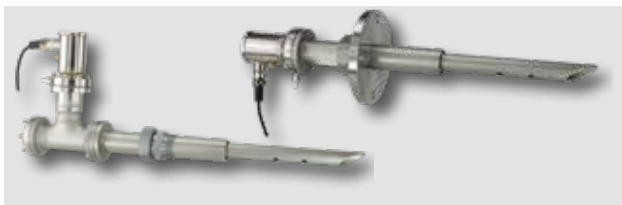

LS2-BF / KS1D-BF GED FLEX


Features:

- Tested filter concept against flashbacks in H₂-applications
- Ideal flue gas velocity: 0,1-30 m/s
- Flue gas temperature depending on the material: ≤ 1400 °C
- Dust concentration: ≤ 1000 mg/ m³
- Adjustment during operation using test gas is possible
- The immersion depth can be adjusted variably
- Using a suitable T-adapter, the GED FLEX can be blown out or fitted with an ejector
- Permissible exhaust gas temperature at the probe head 300 °C for device variants with SIL certificate
- Protection class is IP65

Areas of application:

- Natural gas, EL heating oil, S heating oil, coal, special fuels, hydrogen.

Lambda Probe LS2-Ex / Combination Probe KS1D-Ex with GED FLEX

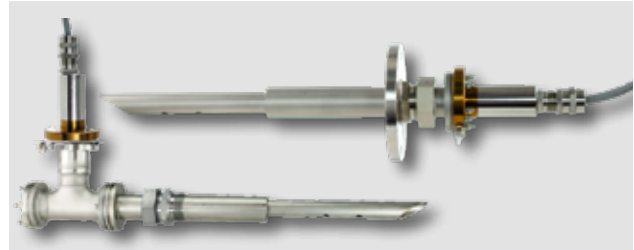

LS2-Ex GED FLEX / KS1D-Ex GED FLEX

Features:

- Ideal flue gas speed: 0,1 - 30 m/sec
- Flue gas temperature depending on the material: ≤ 1400 °C
- Dust concentration: ≤ 1000 mg/m³
- Calibration during operation using test gas is possible
- The immersion depth can be adjusted variably
- Using a suitable T-adapter, the GED FLEX can be blown out or fitted with an ejector
- Permissible exhaust gas temperature at the probe head 300 °C for device variants with SIL certificate
- Protection class is IP65.
- IECEx/ATEX: II2G Ex db (IIB+H2) T4 Gb
II2D Ex Tb IIIC T135°C Db

Areas of application:

- Natural gas, EL heating oil, S heating oil, coal, special fuels

Optional Components.

LSB modules

The LSB modules are universally compatible input and output modules that can be controlled via the LAMTEC SYSTEM BUS. In order to function in this way, the module is configured by an adjustable address. The relay outputs are activated manually using switches.

Analogue Outputs:

There are two different modules for analogue outputs:

- Power module with 4 analogue outputs 0/4 to 20 mA
- Voltage module with 4 analogue outputs 0/2 to 10 VDC



Digital Outputs:

The digital LSB module is equipped with 4 outputs.



Digital Input:

The digital LSB module is equipped with 4 inputs. Using a strapping plug, two modules can be wired quickly which increases the number of inputs to 8.



LSB module for calculating combustion efficiency:

The efficiency module has following properties:

- Two PT100 temperature inputs to record the flue gas temperature and exterior temperature

- Two analogue outputs 0/4 to 20 mA to emit the flue gas temperature and its efficiency
- Power supply 24 VDC / 50 mA



Communication via PROFIBUS:


The Fieldbus modules are connected via the LSB. Regarding the integration into a parent process and building management system, PROFIBUS communication offers many advantages.

- Either installed straight onto the LT3 or externally, e.g. on the switch board
- Fast and precise transmission of processor values
- Immediate reading of inputs and outputs possible
- Remote diagnosis through a readout of the fault history



LSB Remote Software

The LSB USB module and the PC interface make working with the LT3 Lambda Transmitter even easier: The device can be operated remotely using a laptop to set configurations and archive cure data. In this way, back up data can easily and quickly be created and, in the event of an emergency, re-imported which makes the device ready for service in just a few minutes. Using the LSB Remote Software enables users to retrieve and monitor data from the LAMTEC Lambda Transmitter from an office without needing to be present on site.

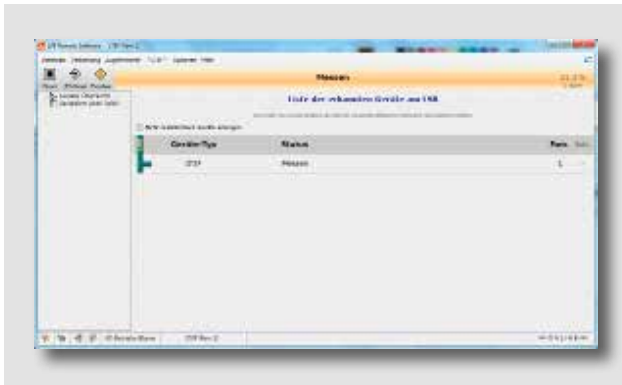

Cover IP65

Cover for UI300-LT3-V2, delivery includes fixing nuts.

- Cover to achieve protection class IP65



Additional IP65 cover for user interface


PCB Probe Connection Box

The LAMTEC PCB Probe Connection Box has been designed to bridge longer distances between the LT3 and the probe without the need for an extension cable (> 2m). Here, the probe connection jack and the blank cover replace the standard screwed cable gland. The PCB contains a terminal strip and implementations for probe plugs.



Inputs.

Outputs.

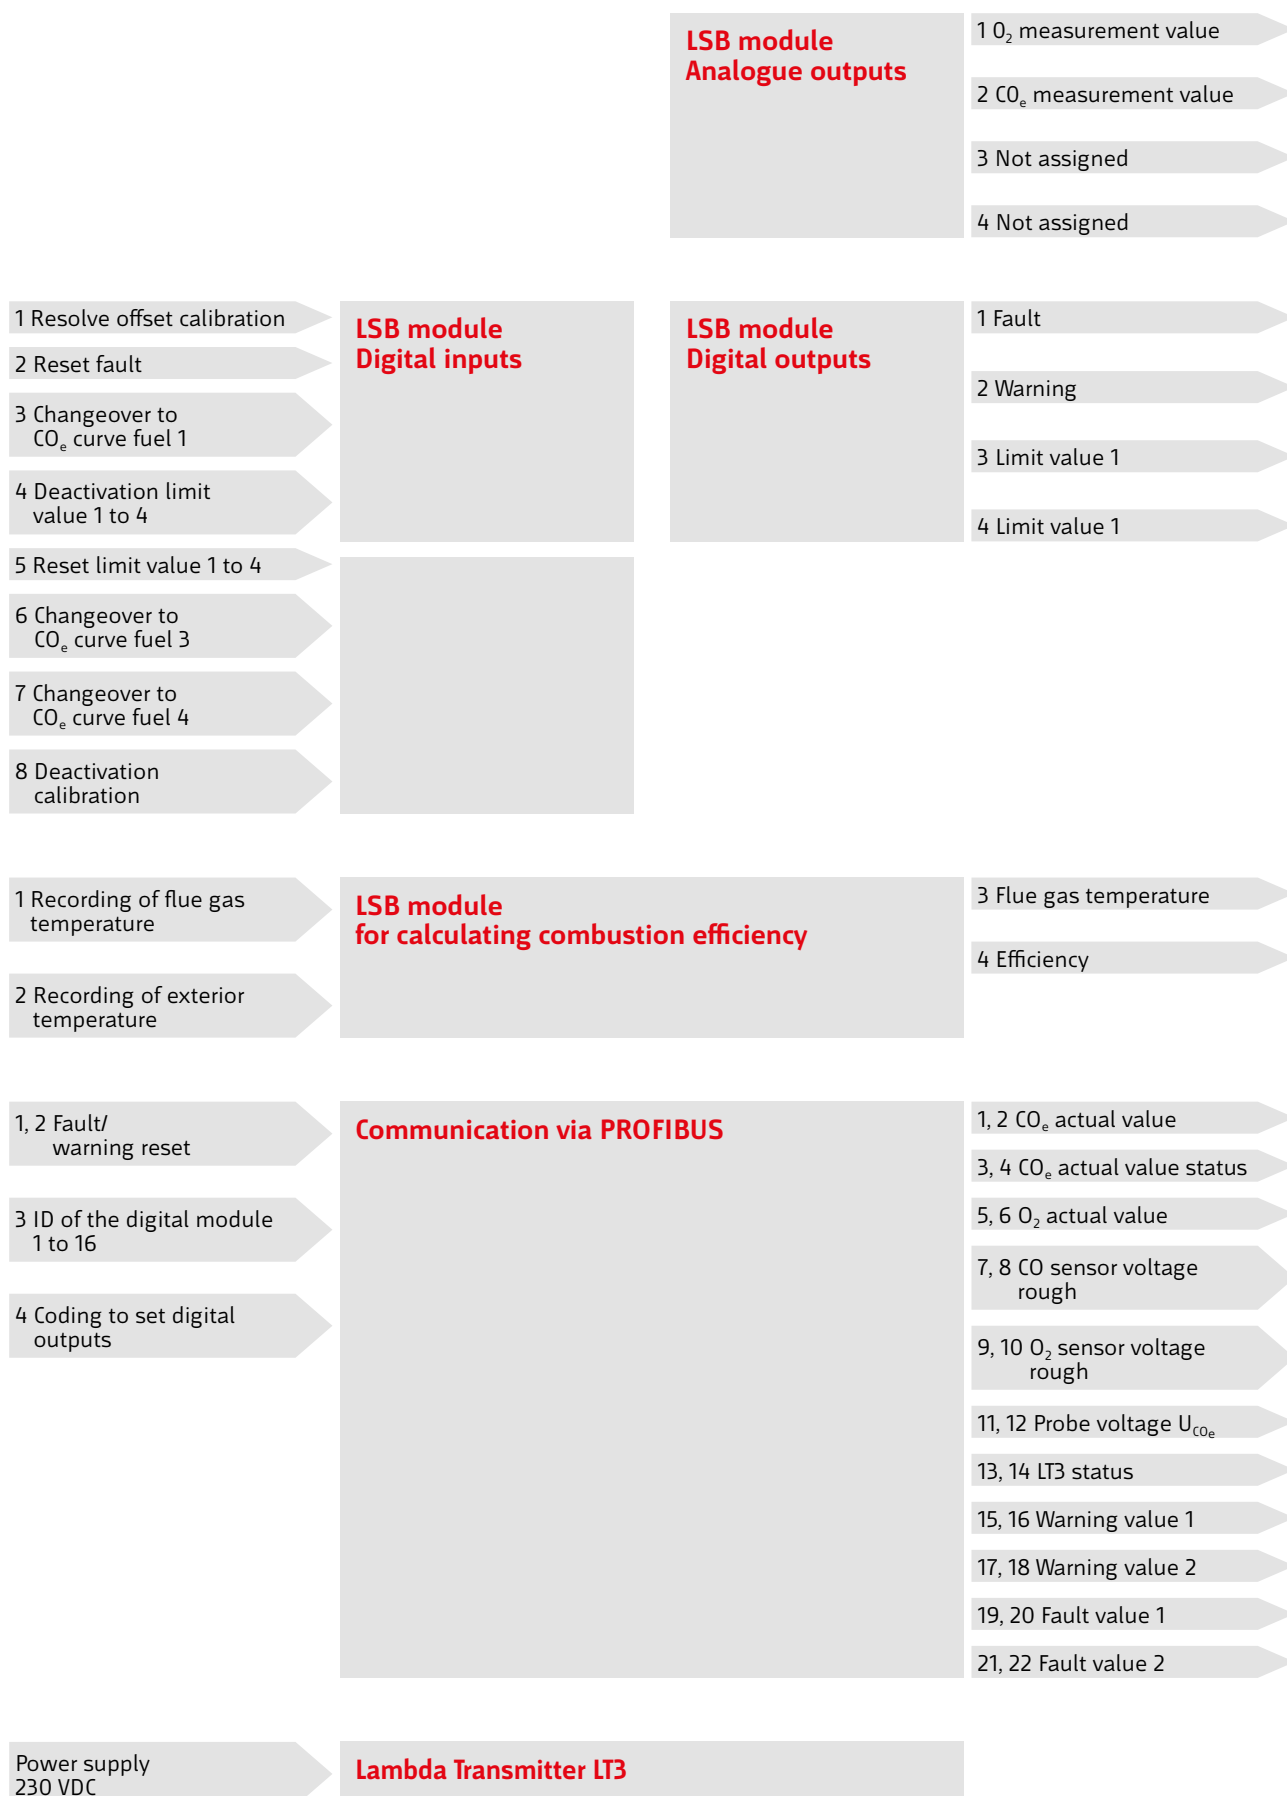

Notes.

Notes.

Notes.



LAMTEC GmbH & Co. KG
Josef-Reiert-Straße 26
D-69190 Walldorf
Telefon: +49 (0) 6227 6052-0
Telefax: +49 (0) 6227 6052-57

info@lamtec.de

www.lamtec.de

