

## Flame Scanner F300K/F350



Product information in accordance with  
Regulation (EU) 2023/2854 (“Data Regulation”) for connected products



## Contents

1 EU Data Act (Regulation (EU) 2023/2854) .....	3
1.1 Cybersecurity vs. EU Data Act .....	3
2 F300K/F350 product data and associated service data .....	3
2.1 Use of data and disclosure to third parties .....	3
2.2 F300K/F350 product data .....	4
2.2.1 F300K/F350 data .....	4
- Operating and status messages, faults .....	5
- Fault, warning or information numbers .....	5
2.2.2 TEC Center data .....	5
2.2.3 Interfaces and formats .....	5
2.2.4 Data volume and up-to-dateness .....	6
2.2.5 Storage locations and duration of storage .....	6
2.3 Associated service data .....	7
2.3.1 PC service software data .....	7
2.3.2 NBM and Visiocontrol 4.0 data .....	7
2.3.3 Service and operating app .....	7
3 Right to complain to the supervisory authority .....	9
4 Right to lodge a complaint under data protection law .....	9
5 Information about trade secrets .....	9

## 1 EU Data Act (Regulation (EU) 2023/2854)

In accordance with Art. 3 Sect. 2 of the Data Act (Regulation (EU) 2023/2854), we hereby provide information about the product data and associated service data generated through the use of connected products and devices from LAMTEC GmbH&Co.KG.

The EU Data Act sets out clear requirements for access to and provision of device data and data from connected services. These regulations apply to all electronic field devices used in measurement and control technology. The EU Data Act gives users the right to access and use the data generated during operation of these devices.

Product data is generated during the use of the device. An obligation to provide this data on the part of the manufacturer (data owner) applies to all data (operating or process data) that is created or generated through the use of a product or a related service (associated service data), for instance, input and output data, sensor values, control commands and operating information such as modes, warnings or malfunctions.

Data that is collected exclusively during setup or commissioning and remains unchanged during ongoing operation is not affected by these requirements. This also applies to passwords and other information for protecting and restricting access and for complying with the General Data Protection Regulation (GDPR).

If this device data is read and processed exclusively by another entity or if no physical access to interfaces is granted, this entity is obligated to provide the user with the original device data. The information about device data and interfaces is then provided by the respective entity.

### 1.1 Cybersecurity vs. EU Data Act

The provisions of the EU Data Act may conflict with the requirements for secure data communication in accordance with cybersecurity standards if the interfaces are used improperly to access product data.

That is why it is essential to introduce and continuously develop comprehensive cybersecurity concepts for products, plants and systems that correspond to the current state of the art. The execution and ongoing assurance of appropriate security measures are the responsibility of the operator and users; for the F300K/F350 products, the information in TRBS 1115-1 currently applies. You can obtain these for the device from our support team ([support@lamtec.de](mailto:support@lamtec.de)).

## 2 F300K/F350 product data and associated service data

This chapter describes the type of data that occurs and the frequency of its transmission during device operation. In addition, the interfaces and protocols for data access are explained and supplementary information on authentication and authorisation procedures is provided.

### 2.1 Use of data and disclosure to third parties

The user is free to use the product and device data of the F300K/F350. If it passes on F300K/F350 data to third parties, for instance to online portals for data analysis or archiving, it must first enter into a contractual agreement with manufacturer LAMTEC GmbH & Co. KG as the data owner.

In principle, every user has the right to pass on data, but LAMTEC GmbH & Co. KG, as the data owner, reserves the right to set certain conditions, primarily to ensure functional safety, cybersecurity and questions of liability in the event of improper use through access to the data.

If LAMTEC GmbH & Co. KG wishes to use or store product data for its own purposes, an agreement with the user is also required for this. This does not apply to the additional processing of product data in order to ensure proper operation of the device.

If the user or its representative decides to send product data to LAMTEC GmbH & Co. KG or stores it in the LAMTEC support app, for instance, in order to process a service case, this will be deemed consent to the storage and processing of the data by LAMTEC GmbH & Co. KG. An objection will result in the data being deleted and the respective services being


## 2.2 F300K/F350 product data

The “F300K” and “F350” products (each of which includes an internally networked FFS30 component) are each regarded as a single device. The primary data, which is exchanged between the components cyclically and in real time, is not the focus of the EU Data Act and is not described in more detail here.

### 2.2.1 F300K/F350 data

The primary data is used to generate process and operating data in the device, which can be accessed by the user through various interfaces. This product data is generated continuously and in real time.

The F300K/F350 devices can contain the following components (modules), although not all of them need to be used.

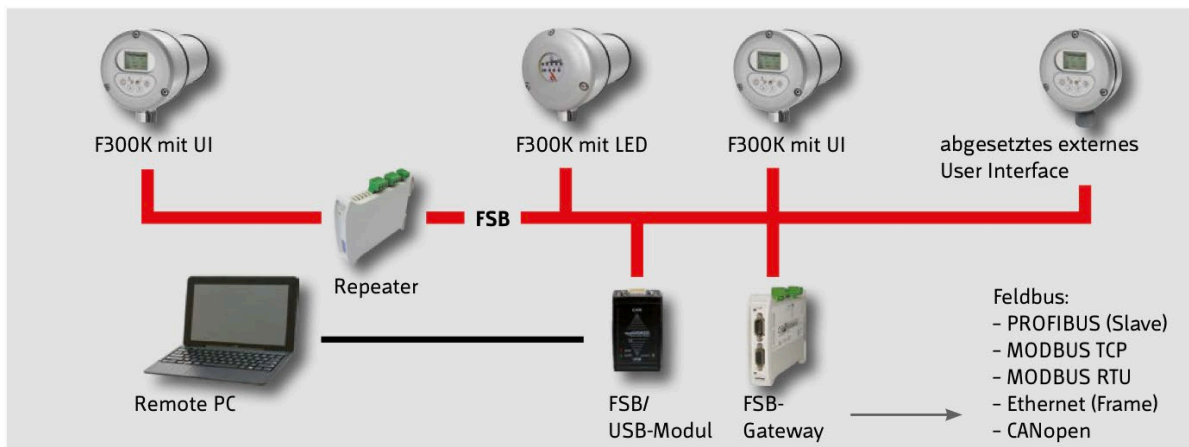

Beispiel: Vernetzung mehrerer F300K.

- FB30: Externes User Interface
- FSB-Gateway
  - PROFIBUS (Slave)
  - Modbus TCP
  - Modbus RTU
  - Ethernet (Frame)
  - CANopen

- 
- FSB Analogue Output Module
  - NBM: Network Bus Module für VC 4.0 Connectivity
  - PC Service-Software

The product data actually generated by the F300K/F350 devices during operation depends on the additional functions that have been configured and purchased, as well as the individual operating and commissioning parameters.

The descriptions of the protocols and data points set out below always refer to the highest available configuration of an F300K or F350, as described in the product data sheet (available at [www.lamtec.de](http://www.lamtec.de)).

During operation, the F300K/F350 devices cyclically store or generate product and service data, which can be classified as follows:

- Operating and status messages, faults
- Measurement data
- (Extended) flame analysis data
- System settings and parameters (only those relevant to operation)
- Input and output states
- Device data (e.g. serial number, version)

### **2.2.2 Schnittstellen und Formate**

F300K/F350 product data is provided during operation via a CAN bus-based proprietary fieldbus protocol (FSB, Flamescanner System Bus) as the standard interface.

The FSB is based on the CAN bus with a fixed baud rate of 500 kbps. The 11-bit standard identifier is used.

The FSB cyclically provides process data in selected messages, which are also used to control the FSB gateways.

All FSB participants receive the transmitted CAN messages and can analyse them as required. Detailed information about the relevant messages and their data content can be requested from our support team ([support@lamtec.de](mailto:support@lamtec.de)).

Another optional way to access product data is via read-only access to a limited set of data using the paid add-on modules "FSB-Gateway". These convert selected FSB messages into other fieldbus protocols, such as:

- PROFIBUS (Slave)
- Modbus TCP
- Modbus RTU
- Ethernet (Frame)
- CANopen

In addition to digital fieldbus interfaces, some process data can also be acquired in analogue form. The device features a current output for this purpose: 0/4–20 mA (F300K only), which can be configured to correspond to various process signals within the device.

In addition, an optional analogue module (subject to a charge), controlled by the FSB, allows several selected process signals and service data from the Extended Flame Analysis (EFA) to be output; these can also be configured within the device:

- Analogue output modules (0–10 VDC signal)

The data format depends on the respective data content (numerical, binary, etc.). Detailed information about the available product data and the applied protocol can be requested from our support team ([support@lamtec.de](mailto:support@lamtec.de)).

Users of these interfaces are responsible for executing and complying with appropriate cybersecurity measures that are suitable for their application. The full functionality of the device must also be maintained through the proper use of the communication interfaces by the user or an authorised third party.

### **2.2.3 Data volume and up-to-dateness**

The data volume on the FSB varies depending on the type of data and the number of connected add-on modules and queries. The FSB operates at a baud rate of 500 KB or 500 kbit/s.

The actuality of the data depends on the time interval at which, for example, system data is requested via RTR.

The data provided by the FSB gateway is updated cyclically every 500 ms within the FSB gateway. In the standard configuration of the FSB gateway, the data in the FSB gateway lapses after 1 second if the F300K/F350 does not update the data.

Detailed information about the available product data and the protocols implemented in the add-on modules can be requested from our support team ([support@lamtec.de](mailto:support@lamtec.de)).

### **2.2.4 Storage locations and duration of storage**

The data is stored in the RAM of the F300K/F350 devices and is used during operation for internal processing purposes to ensure the device functions as intended. Once operation has ceased, this data is deleted.

This does not include information that documents the history of the device, such as error histories (the last faults, including additional detailed information), operating hours and the number of burner start-up processes. This data is permanently stored in the device EEPROM and can also be retrieved through the interfaces.

## 2.3 Associated service data

When using the device, associated service data (e.g. from software, apps or diagnostic tools interacting with the device) may be generated. LAMTEC GmbH & Co. KG itself offers the following tools and apps that can generate associated service data. For connected services from third parties authorised by the user, detailed information is provided by the respective service owners.

### 2.3.1 PC Service Software Daten

The PC service software is used for configuration, commissioning, and servicing of the product. The PC service software is not required during regular operation. User data is never automatically transmitted to LAMTEC GmbH & Co. KG.

During commissioning, configuration or servicing, the PC service software can be connected through the CAN interfaces (FSB) and reads all data and parameters. These can be visualised or modified in the software, depending on the user authorisation with passwords and approval levels of the F300K/F350 and the PC service software itself.

In some cases, data and associated service data are temporarily stored locally in order to display trend diagrams and other trend-based information. This data is deleted after the PC service software is closed.

Datasets containing selected (selective dataset) or all F300K/F350 parameters can be read from the device by the user with the PC service software and saved as a file. Depending on permissions, parameters can be written back to the F300K/F350 using datasets. The datasets can be saved by the user to any storage location and can also be deleted by the user there.

### 2.3.2 NBM and Visiocontrol 4.0 data

The NBM is used for secure data connection with the Visiocontrol 4.0 (VC 4.0) product. Selected F300K/F350 product data is exchanged with a cloud platform using point-to-point communication in order to visualise and store it in the Visiocontrol 4.0 cloud application and to provide additional intelligent connected services, such as predictive maintenance functions. This may result in associated service data, depending on the use and configuration of the VC 4.0 product.

Additional information regarding the EU Data Act on NBM and Visiocontrol 4.0 will be published separately for the product by LAMTEC GmbH & Co. KG and can be requested from our support team ([support@lamtec.de](mailto:support@lamtec.de)).

### 2.3.3 Service and operating app

The LAMTEC GmbH & Co. KG apps for service and operation enable users to store product data for visualisation and service requests (support tickets), as well as for their own use (snapshots), in a remote database as well as locally. Comprehensive user and authentication management prevents the unintentional disclosure of product data to third parties. The data is stored in accordance with the GDPR.

The product data must be transmitted to the apps either by the user or by an authorised person. The product data can be collected manually or scanned from the device display using a QR code. All collected data can be displayed locally in the app and can be edited and deleted locally. Additional information, such as error descriptions, documents, images or videos, can be added by the user.

The collected product data and all additional information are stored in a remote, central database after a support request has been submitted. In addition to the user, the assigned service partner (OEM) and, subject to a separate agreement, LAMTEC GmbH & Co. KG also have access to the data for the purpose of processing support cases, improving products and creating generalised and anonymised solution proposals (public solutions) for other users of the LAMTEC support app.

Both the collection and subsequent transmission of product data through the database to the manufacturer or service partner require the active participation of the user, who has been informed of this in advance when registering with the LAMTEC support app and has given their consent.

By performing these actions, the user is deemed to have given their consent to the storage and processing of the data by LAMTEC GmbH & Co. KG or the respective service partner. If the user does not agree to this, the LAMTEC support app may not be used.

The user can delete all images, videos, documents and product data downloaded locally within the app, or the entire account, in the LAMTEC support app.

Each user can view all of their local and sent data in the support app under the individual account and transmit support ticket entries to other applications using copy and paste.

On request to LAMTEC support ([support@lamtec.de](mailto:support@lamtec.de)), all data sent in connection with the user can also be deleted from the remote database by LAMTEC GmbH & Co. KG.

### **3 Right to complain to the supervisory authority**

If you believe that your rights under the Data Act have been violated, you also have the right to complain to the competent supervisory authority (in accordance with the Data Act).

Contact details of the responsible public authority:

Federal Network Agency for Electricity, Gas, Telecommunications, Post and Railways  
Tulpenfeld 4  
53113 Bonn  
Telephone: 0228 14-0  
Fax: 0228 14-8872  
E-mail: [info@bnetza.de](mailto:info@bnetza.de)


### **4 Right to lodge a complaint under data protection law**

Irrespective of this, you have the right to lodge a complaint with the supervisory authority responsible for data protection in accordance with Art. 77 GDPR. Information and contact: <https://www.lamtec.de/datenschutz>

### **5 Information about trade secrets**

The data generated by the connected product and service does not contain any data that is subject to trade secret protection.



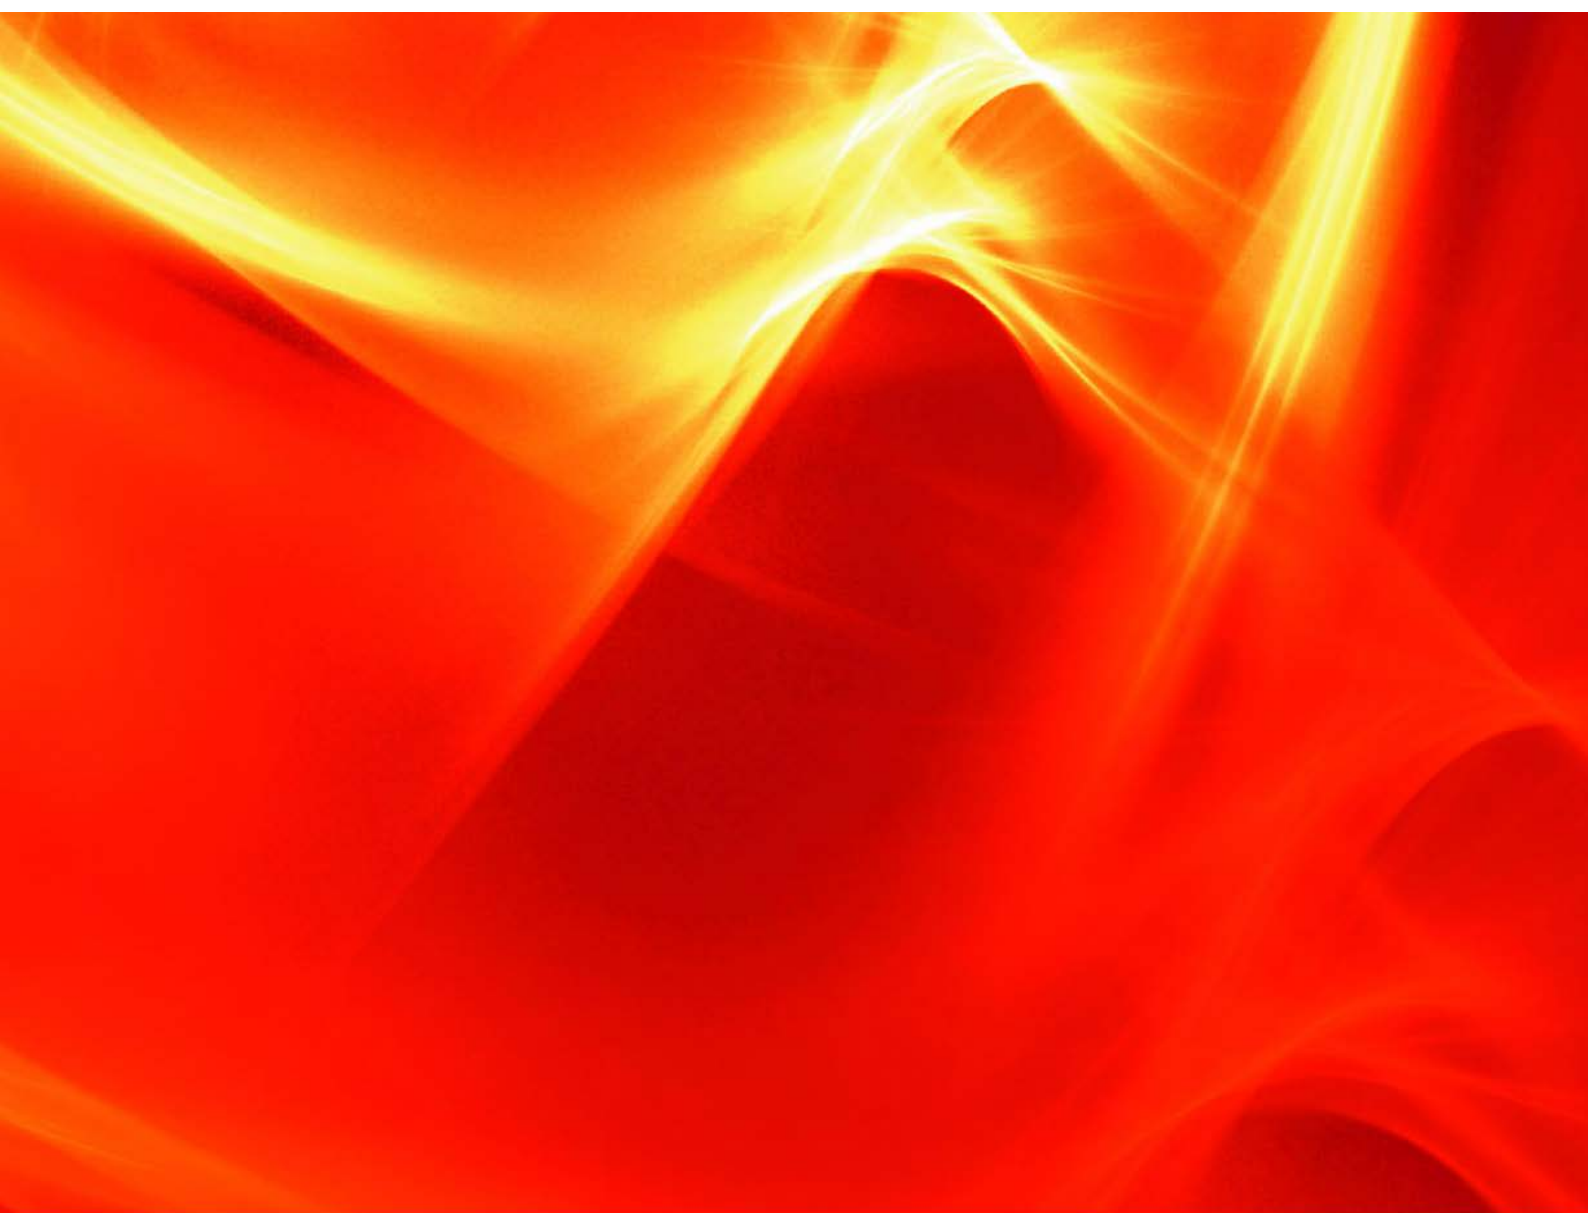

The information in this publication is subject to technical changes.



---

**LAMTEC GmbH & Co. KG**

Josef-Reiert-Straße 26

69190 Walldorf

GERMANY

Telefon: +49 (0) 6227 6052-0

Telefax: +49 (0) 6227 6052-57

[info@lamtec.de](mailto:info@lamtec.de)  
[www.lamtec.de](http://www.lamtec.de)

