

Technical Data PROFIBUS DP

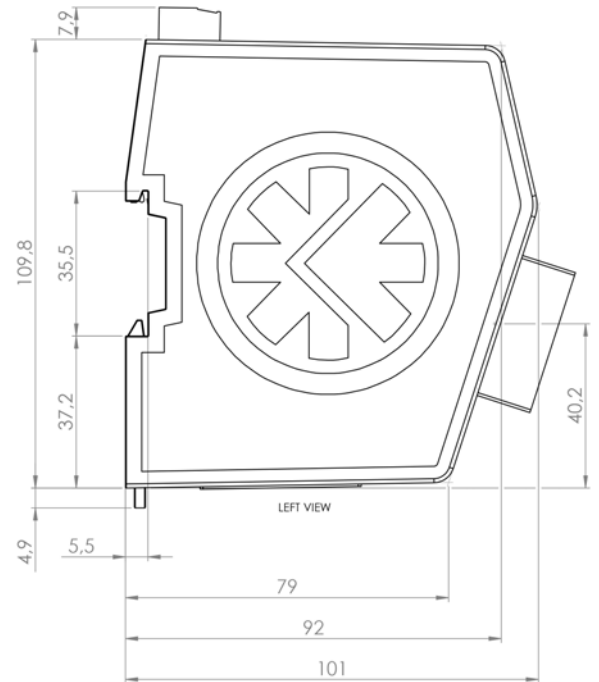
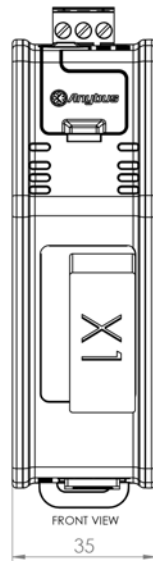


Fig. 1 PROFIBUS DP Gateway
668R1400

Fig. 2 Dimensional Drawing

PROFIBUS DP Gateway 668R1400

Power supply	24 VDC (-15 ... +20 %)
Power consumption	max. 300 mA at 24 VDC Typical: 150 mA at 24 VDC
Surrounding temperature	70 °C at 225 mA at 24 VDC
Protective Earth (PE):	Internal connection to PE via DIN-rail or, if the DIN-rail cannot be used, via the power connector.

NOTICE

The limits of the technical data must be strictly adhered to.

Order Information

Description / Type	Order no.
Gateway Modbus-TCP / Profibus DP Slave	668R1400

The information in this publication is subject to technical changes.



**LAMTEC Meß- und Regeltechnik
für Feuerungen GmbH & Co. KG**

Josef-Reiert-Straße 26

D-69190 Walldorf

Telefon: +49 (0) 6227 6052-0

Telefax: +49 (0) 6227 6052-57

info@lamtec.de
www.lamtec.de

