

Technical Data UI400

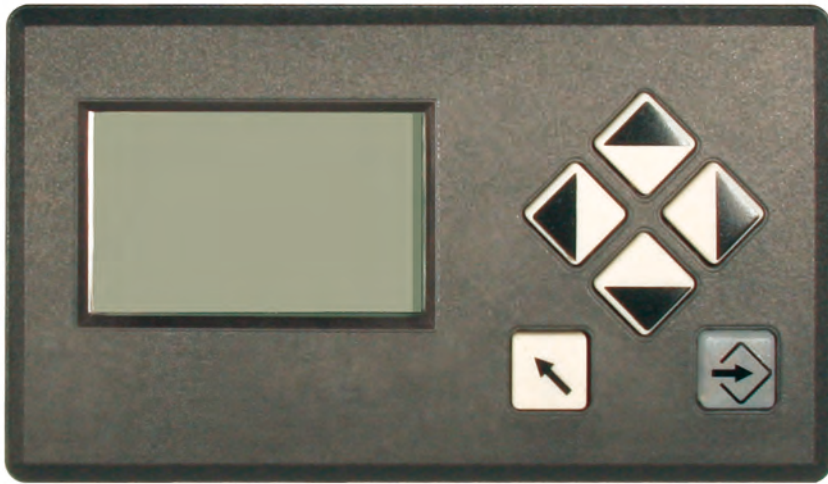


Fig. 1 UI400 photo

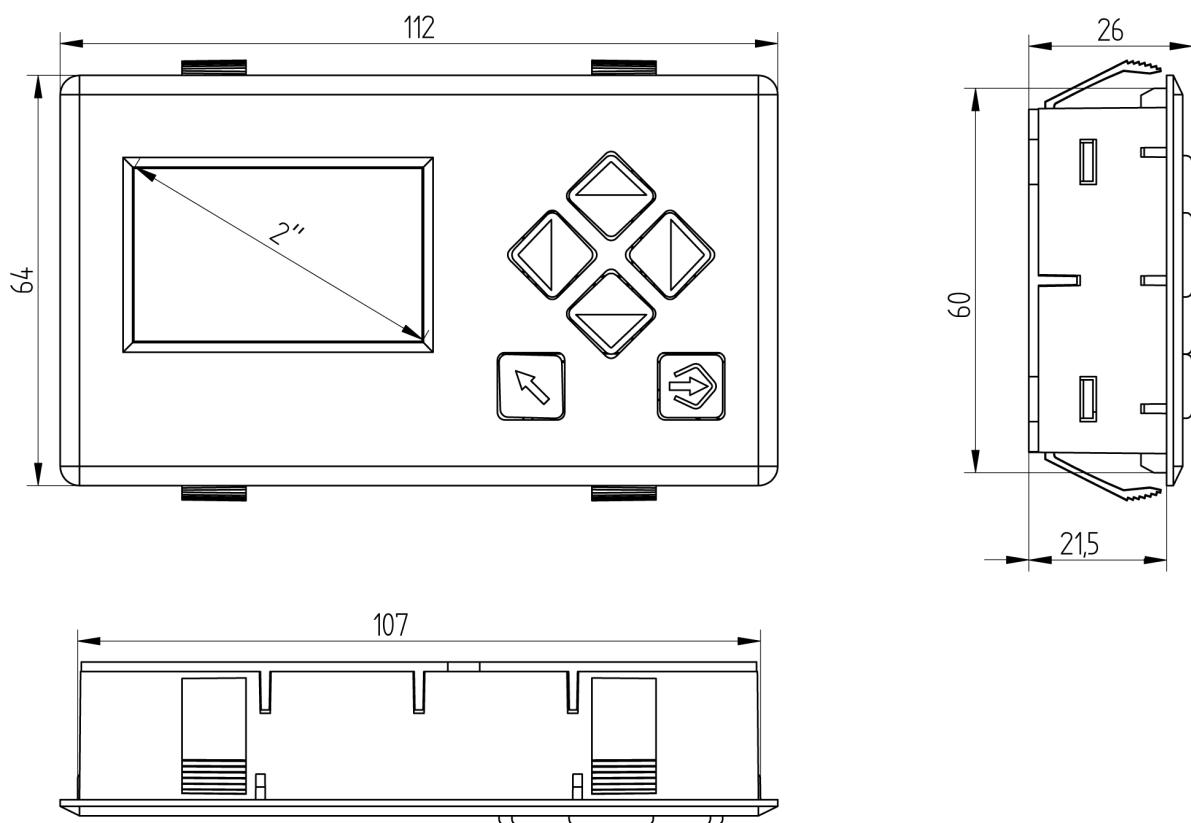


Fig. 2 UI400 mounting dimensions

Cut-out for UI400 installation: 108 mm × 61 mm:

Part number

UI400 user interface, connection via LSB

Type 668R0300

Technical Data UI400

Technical Data UI400

Display	128 x 64 pixels, monochrome white backlight (dimnable)
Dimensions (H x W x D)	64 x 112 x 26 mm / 2.52 x 4.41 x 1.02" in
Weight	0.149 kg / 0.33 lb
Power supply voltage	Via LSB
Power consumption	1 W
Flammability	UL-94 V0
Cable length	2.5 m / 98.42" in

Environmental Conditions

Operation	permitted temperature range	-30...+70 °C (non-condensing)/ -22 ... +158 °F
	permitted humidity	5 % ... 95 % relative humidity
Transportation/ Storage	permitted temperature range	-40...+80 °C (non-condensing)/-40 ... +176 °F
	permitted humidity	5 % ... 95 % relative humidity
Electrical safety	DIN EN 60529	IP20 (as long as all terminals are mounted)

NOTICE

The limits of the technical data must be strictly adhered to.

Order Information

Display modules User Interface UI400

Description/Type	Order no.
UI400 UserInterface, connection via LSB	668R0300



The information in this publication is subject to technical changes.



**LAMTEC Meß- und Regeltechnik
für Feuerungen GmbH & Co. KG**

Wiesenstraße 6
D-69190 Walldorf
Telefon: +49 (0) 6227 6052-0
Telefax: +49 (0) 6227 6052-57

info@lamtec.de
www.lamtec.de

