

Technical Data GKI300



Fig. 1-1 Views GKI300

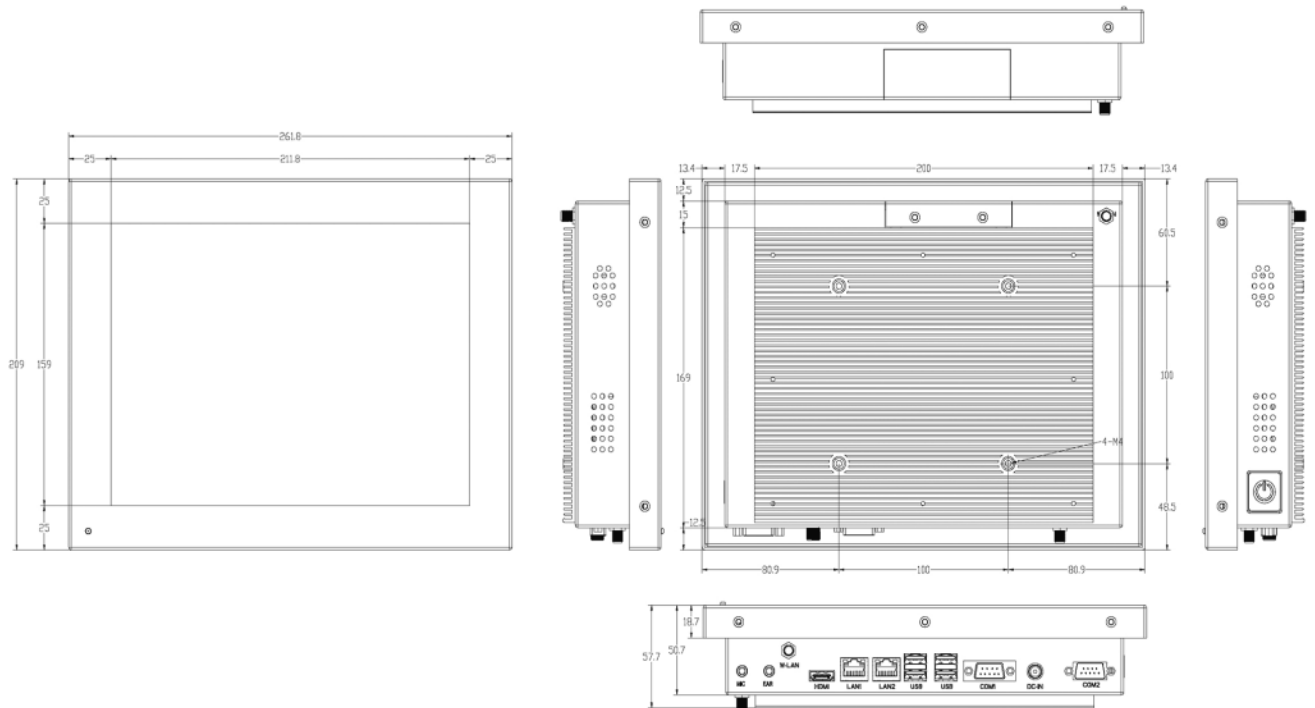


Fig. 1-2 Dimensions GKI300

Technical Data GKI300

Display (only valid for the 10" standard version of the GKI)	
LCD size	10,4"
Max. resolution	1024 x 768 pixels
Brightness	250 cd/m ²
Contrast	600:1
LCD colours	262K
Pixel pitch	0.0675 (H) x 0.2025 (V) mm
Viewing angle	150°/130° (H/V)
MTBF background lighting	40,000 hrs
Mounting	Panel, rack, and swivel arm VESA 100x100 mm/ 3.93"x3.93" in
Dimensions (HxWxD)	202x235x31 mm/7.95"x9.25"x1.22" in
Weight	2,2 kg/4.85 lb
Touch screen	Resistive, 4-wire
CPU (processor)	
	Intel® Atom™ N2600 (optional N2800)
Memory	
	2GB 533 MHz DDR3 SO-DIMM pre-installed (4GB max.f. N2800)
Power supply	
	8-36 V
Power consumption	
	7 W
Accessories	
Panel installation kit	Obligatory for panel installation
Operating condition	
Ambient temperature	Operation: -25 °C ... +75 °C/-13 °F ... +167 °F
Material	
Housing and Front frame	aluminium

Order Information

Graphical Customer Interface local

Description / Type	Order-no.
Graphical customer interface for panel mounting, including: - Graphical customer interface, installed on 8,4" Touch screen panel PC - Panel mounting kit	663R9041T
Graphical customer interface for wall mounting, including: - Graphical customer interface, installed on 8,4" Touch screen panel PC - Wall mounting kit	663R9041W
Graphical customer interface, installed on 12" Touch screen panel PC, incl. panel mounting kit	663R9051

The information in this publication is subject to technical changes.

**LAMTEC Meß- und Regeltechnik
für Feuerungen GmbH & Co. KG**

Wiesenstraße 6
D-69190 Walldorf
Telefon: +49 (0) 6227 6052-0
Telefax: +49 (0) 6227 6052-57

info@lamtec.de
www.lamtec.de

