

# Technical Data PSU24150



Fig. 1 Power supply PSU24150

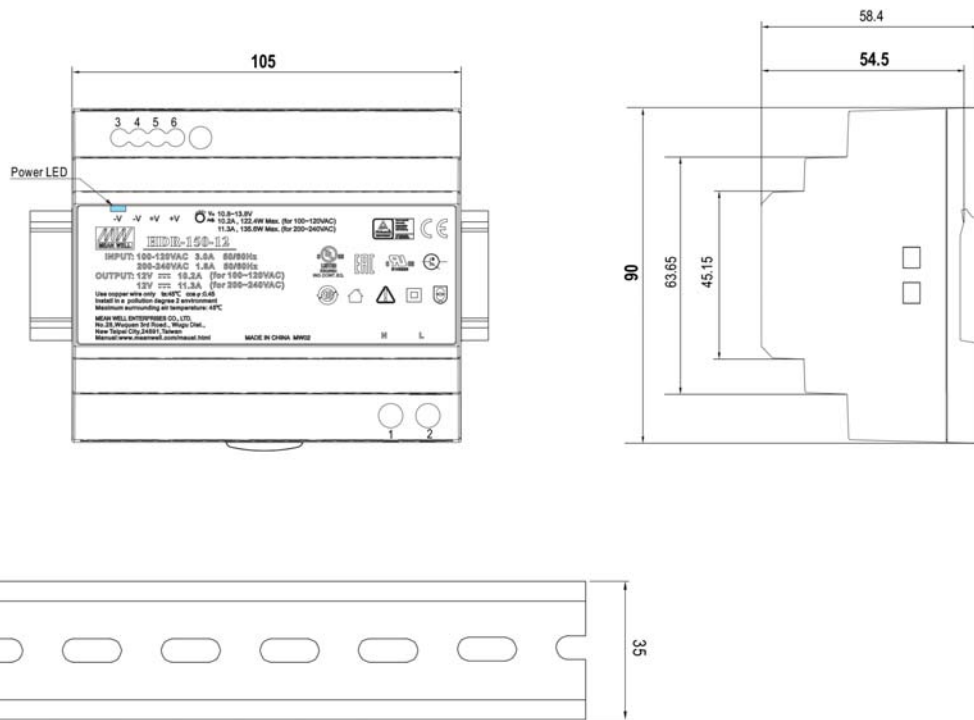


Fig. 2 Dimension power supply PSU24150

## Technical Data PSU24150

### Technical Data PSU2415

Dimension (h x w x d)	90 x 105 x 58.4 mm / 3.54 x 4.13 x 2.30" in		
Weight	310 g / 0.68 lb		
Material	plastic		
Housing colour	grey		
Display	LED (power ON)		
Connection			
Outputs	24 V		
		115 VAC	230 VAC
	nominal current	5.31 A	6.25 A
	power rate	127.4 W	150 W
Inputs	power supply	85 ... 264 VAC	
	mains frequency	47 ... 63 Hz	
		<b>115 VAC</b>	<b>230 VAC</b>
	current consumption	3 A	1.6 A
	inrush current (type)	35 A	70 A

### Conditions of Use

Mounting	on DIN mounting rail TS35/7.5 or TS35/15
----------	--

### Environmental Conditions

<b>Operation</b>	permissible temperature range	-30 ... +70 °C (non-condensing) / -22 ... +158 °F
	permissible humidity	20 ... 90 % relative humidity
<b>Transport/Storage</b>	permissible temperature range	-40 ... +85 °C (non-condensing) / -40 ... +185 °F
	permissible humidity	10 ... 95 % relative humidity
<b>Protection class</b>	DIN EN 61140	II
<b>Degree of protection</b>	DIN EN 60529	IP20

### NOTICE

The limits of the technical data must be strictly adhered to.

# Technical Data PSU24150


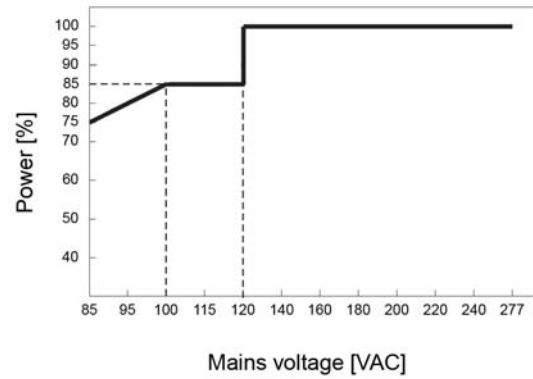


Fig. 3 Power reduction depending on the ambient temperature Fig. 4 Power reduction depending on the power supply

## Order Information

### Power Supply Units PSU24150

Description/Type	Order no.
PSU24150 power supply unit 100 ... 240 VAC/24 VDC, 150 W	668R0150

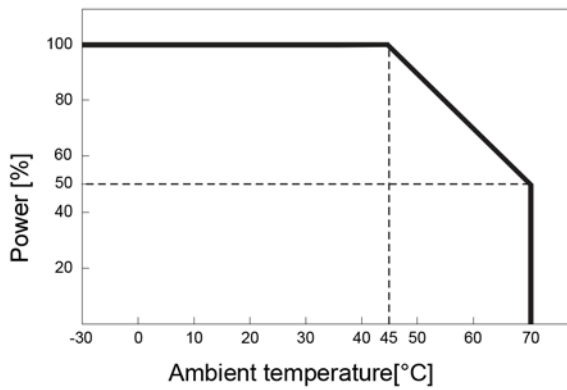

The information in this publication is subject to technical changes.



**LAMTEC Meß- und Regeltechnik  
für Feuerungen GmbH & Co. KG**

Wiesenstraße 6  
D-69190 Walldorf  
Telefon: +49 (0) 6227 6052-0  
Telefax: +49 (0) 6227 6052-57

[info@lamtec.de](mailto:info@lamtec.de)  
[www.lamtec.de](http://www.lamtec.de)

